


■ SPECIFICATIONS


Model Number	AT-064 S	AT-304 S	AT-604 S
Input range	6W	30W	60W
Attenuation	5 steps (0dB, -6dB, -12dB, -22dB, OFF)		5 steps (0dB, -3dB, -12dB, -22dB, OFF)
Priority Overriding	DC 24V		
Finish	ABS resin		
Dimensions (mm)	87 x 87 x 51	87 x 87 x 47	87 x 87 x 67
Weight (g)	99	100	230

■ APPEARANCE

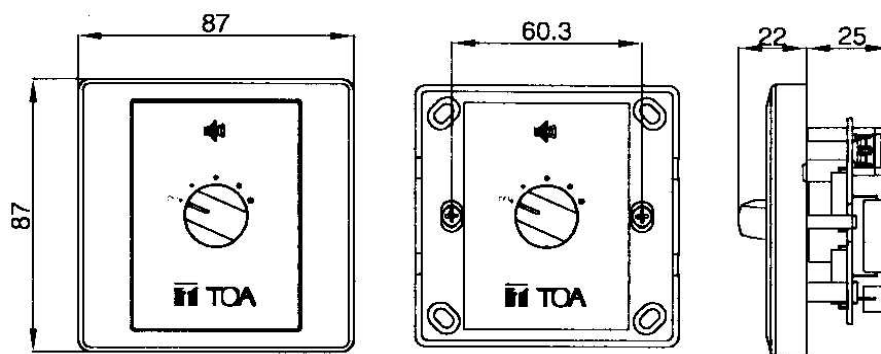


*Above appearance is AT-304 S.


2 WIRING



3 WIRING



4 WIRING



Model Number	ET-120	ET-200
Rated Input	120W	200W
Impedance	100V: 16.7 ohms 70V: 8.3 ohms 25V: 4.1 ohms 12V: 2.0 ohms	100V: 14.3 ohms 70V: 7.1 ohms 25V: 3.5 ohms 12V: 1.7 ohms
Weight (g)	425	440

