

CK-313

COLUMN LOUDSPEAKER

FEATURES

- High quality sound and background music performance
- Ideal for environments where directivity is highly required
- Weather resistant to IP44
- Standard mounting racks
- Strong aluminum enclosure and iron grille
- Compliance with international safety standards

CK-313 is one of the multi-purpose column loudspeaker family featuring durability, attractive shape and easy installation. The super sound quality makes the speakers suitable for indoor applications where directivity is highly required. Typical examples are: hotels, airports, exhibition halls, factories, and theaters.


Column loudspeakers are subject to wall mounting with standard racks, which can be adjusted to different angles. Terminals on the back are convenient for user to choose different output power in various applications.


SPECIFICATIONS

Model	CS-313
Max Power	45 W
Rated Power	30 W
Power taps @100V	30 W / 15 W
Power taps @70V	15 W / 7.5 W
Sensitivity	92.5 dB
Max sound pressure level (1 m)	102.3 dB
Frequency range (-10 dB)	181 Hz - 20 KHz
Vertical Dispersion	90°
Horizontal Dispersion	110°
Rated input voltage	70 V / 100 V
Rated impedance	333 Ω / 667 Ω
Dimensions (W x H x D)	75 x 105 x 546 mm
Weight	2.7 kg
Color	White
Materials(enclosure and grille)	Aluminum and iron

ORDERING INFORMATION


Front and back views









Direction Diagram



Circuit Diagram



Frequency Response at dBspl (20uPa)@1m, 40W/100V input, 1/3 oct smoothing)

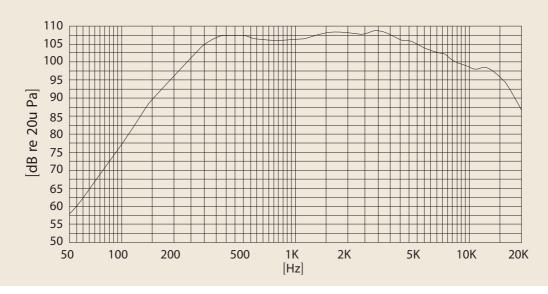

Phone: +86 20 2839 9600 Fax: +86 20 2839 8706 Website: www.empertech.com D2100040566_EN2.0 Jul. 2011 Specifications subject to change without notice © 2011 Honeywell International Inc.

