



Ci SERIES


HIDE YOUR SPEAKERS, NOT YOUR SOUND

Home > Showroom > Custom Installation > Ci Series > Speakers Selector > Ventura 4

SHARE [f](#) [t](#) [e](#)

Ci Series

Print Page

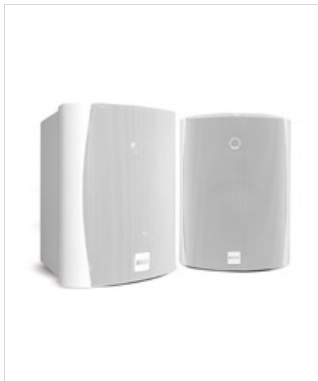

Document Download

- Outdoor series brochure
- Ventura information sheet
- Ventura manual
- Download page as PDF

Related Products

- Ventura 6
- Ventura 5

Ventura 4

[Speakers Selector >](#)

Weatherproof, IP65 certified and salt spray tested, marine quality Ventura Series outdoor models can flood your pool, garden or yacht with high quality sound, even in the most extreme atmospheric conditions.

Key features:

- Weatherproof sealed enclosure
- Salt spray tested for over 1200 hours
- Operating temperature range: -40 to +70 C (-40 to +158 F)
- Independent test lab certified IP65
- Aluminium grille and mounting bracket, 1/4"-20 threaded inserts for mounting options
- Stainless steel / brass hardware
- Rotatable logo

Model	Ventura 4*
Type	Two-way Sealed box
HF Unit (Fluid Cooled Aluminium)	19mm Tweeter
LF Unit	115mm (4.5in.)
Effective Frequency Range +/- 3dB	75Hz-20kHz
Crossover Frequency	3.5kHz
Characteristic Sensitivity Level (at 1m on axis for an input of 2.83v)	88dB
Recommended Amplifier Power	10 - 80 Watts
Nominal Impedance	6Ω
Net Weight	2.4kg (5.3lbs)
Operating Temperature Range	-40°C to 70°C (-40°F to 158°F)

Dimensions, Cabinet only (H x W x D)	231 x 172 x 173 mm (9 x 6.75 x 6.8 in.)
---	--

Dimensions, With bracket and knobs (H x W x D)	235 x 172 x 203.2 mm (9.25 x 6.75 x 8 in.)
---	---

*Independent test laboratory certified IP65

GP Acoustics (UK) Ltd, reserve the right, in line with continuous research and development, to amend or change the specifications without prior notice. E. & O.E.