
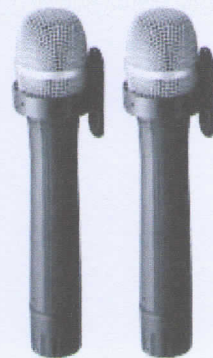


PD-12AB / PD-15AB

ACTIVE PORTABLE LOUDSPEAKER

NTS

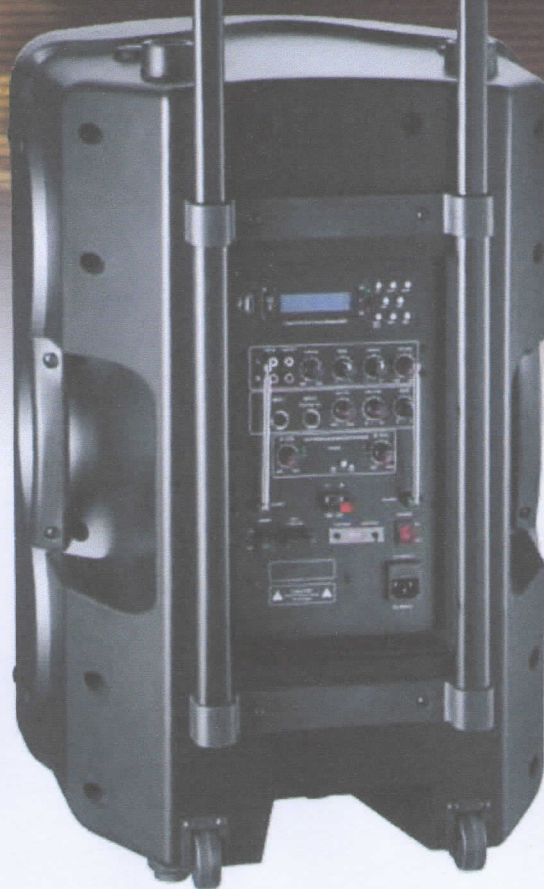

TECHNICAL SPECIFICATION

12"/15" ACTIVE PORTABLE LOUDSPEAKER
with USB SLOT & WIRELESS MIC & BATTERY

PD-12AB

Frequency response	80Hz ~ 18KHz
Sensitivity [1w/1m]	95dB
Power handling	200W
Voice coil	1.5" KSV
Magnet	40 Oz.
Low frequency	12" Woofer
High frequency	1" (25 mm.)
Nominal impedance	4Ω

POWER AMPLIFIER + USB SLOT & LCD SCREEN

Rated power	200W
Power Requirement	220 VAC, 50 Hz / 12VDC

PD-15AB

Frequency response	75Hz ~ 18KHz
Sensitivity [1w/1m]	96dB
Power handling	300W
Voice coil	2" KSV
Magnet	40 Oz.
Low frequency	15" Woofer
High frequency	1.34" (34 mm.)
Nominal impedance	4Ω

POWER AMPLIFIER + USB SLOT & LCD SCREEN

Rated power	300W
Power Requirement	220 VAC, 50 Hz / 12VDC