## SI 3C LP

Full-Range Ceiling 8 Ohm Speakers with 4" Low Profile Back Can



## System Integrator KER SERIES




## DESCRIPTION

The Extron SI 3C LP is a full-range ceiling speaker featuring a 4" (10.2 cm) Low Profile metal back can for use in plenum ceilings. The low profile speaker is an excellent choice for ceiling installations with tight above-the-ceiling tile space issues, such as air handling units installed close to the ceiling. The 3" (7.6 cm) full-range driver features an incredibly wide frequency response of 75 Hz to 17 kHz, 16 watts continuous pink noise and 32 watts continuous program capacity, and an extremely wide conical dispersion of 170°.

## **FEATURES**

- 4" (10.2 cm) deep low profile metal back can for plenum environments
- 3" (7.6 cm) full-range driver with a tuned port
- 8 ohm direct
- · Frequency response: 75 Hz to 17 kHz
- 16 watts continuous pink noise, 32 watts continuous program
- · Locking arms for quick ceiling installation
- Includes C-ring & V-rail kit
- · Grille and bezel are available in white only and may be painted to match environment
- 5 year parts and labor warranty

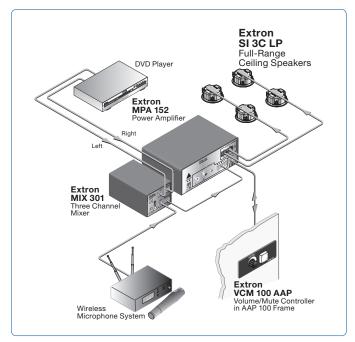

	SPECIFICATIONS
	AUDIO/ACOUSTIC AND ELECTRICAL
Frequency response	75 Hz to 17 kHz, -10 dB, half space
Power capacity	16 W continuous pink noise
	32 W continuous program
Nominal sensitivity	83 dB SPL, 1 W, 1 m, half space
Nominal coverage angle	170° conical coverage
Nominal impedance	8 ohms
Driver	(1) 3" (76 mm) paper cone
Overload protection	Full range power limiter
Input connector	(1) 5 mm captive screw connector, 4 pole for 1 input and 1 loop-through
	GENERAL
Package	2 speakers (1 pair)
Mounting	Ceiling mountable with included hardware:
	V-rails for 2' x 4' (600 mm x 1200 mm) ceiling tiles, and C-rings
Enclosure type	Metal back can; high-impact, fire-resistant (UL94V-0) plastic baffle/rim
Enclosure outer dimensions	4.0" H x 9.9" diameter
	(102 mm x 251 mm diameter)
Cutout dimensions	8.937" diameter
	(227 mm diameter)
Product weight	Single: 5 lbs (2.3 kg)
Shipping weight	Pair: 20 lbs (10 kg) with mounting kit
Regulatory compliance	
Safety	CE, UL 2043, UL1480
EMI/EMC	CE, NFPA90, NFPA70A
Warranty	5 years parts and labor

For complete specifications, please go to www.extron.com

M	DDE	L
SI	3C	LP

VERSION DESCRIPTION 

PART #