



EM-360 / 370HS DM-270 / 320 / 420 / 520

Wired Microphones




Specifications


Microphone	DM-270	DM-320	DM-420	DM-520	EM-360	EM-370HS
Type	Dynamic				Electret condenser	
Directivity	Unidirectional					
Rated Impedance	600 Ω, balanced				2 kΩ, unbalanced	2.5 kΩ, unbalanced
Sensitivity (1 kHz, 0 dB = 1 V/Pa)	-52 dB	-55 dB	-52 dB	-55 dB	-48 dB	-51 dB
Frequency Response	100 Hz - 15 kHz	100 Hz - 12 kHz	80 Hz - 13 kHz		100 Hz - 16 kHz	50 Hz - 12 kHz
Cable Length	5 m	7.5 m			7 m	10 m
Connector	XLR-3				Unbalance phone jack	
Talk Switch	Short-off, slide switch			Short-off, slide switch, magnetic switch, locking system	—	—
Finish	Body: Die-cast aluminum Head: Die-cast aluminum / zinc plated steel wire				ABS	Battery case: ABS Headset: Metal
Dimensions	ø47 x 175 mm	ø52 x 183 mm		ø50 x 176 mm	38 x 89.5 x 19 mm (mic body)	
Weight	300 g		280 g	232 g	131 g	142 g
Battery	—	—	—	—	1 x 'AA' (R6S or UM-3U)	
Accessory	Microphone holder				Clip holder	—

Characteristic Diagrams

Frequency Response

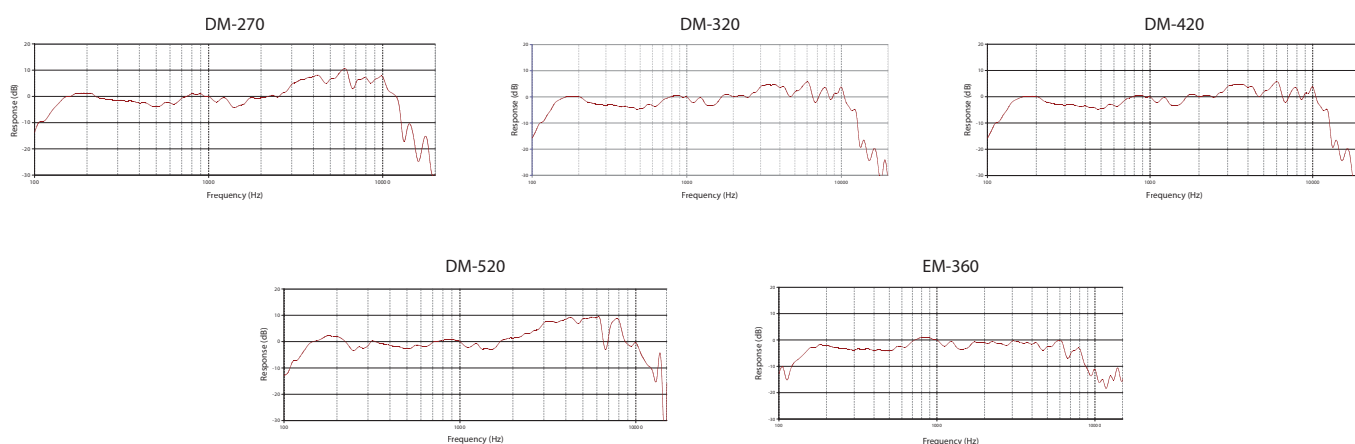

Polar Response

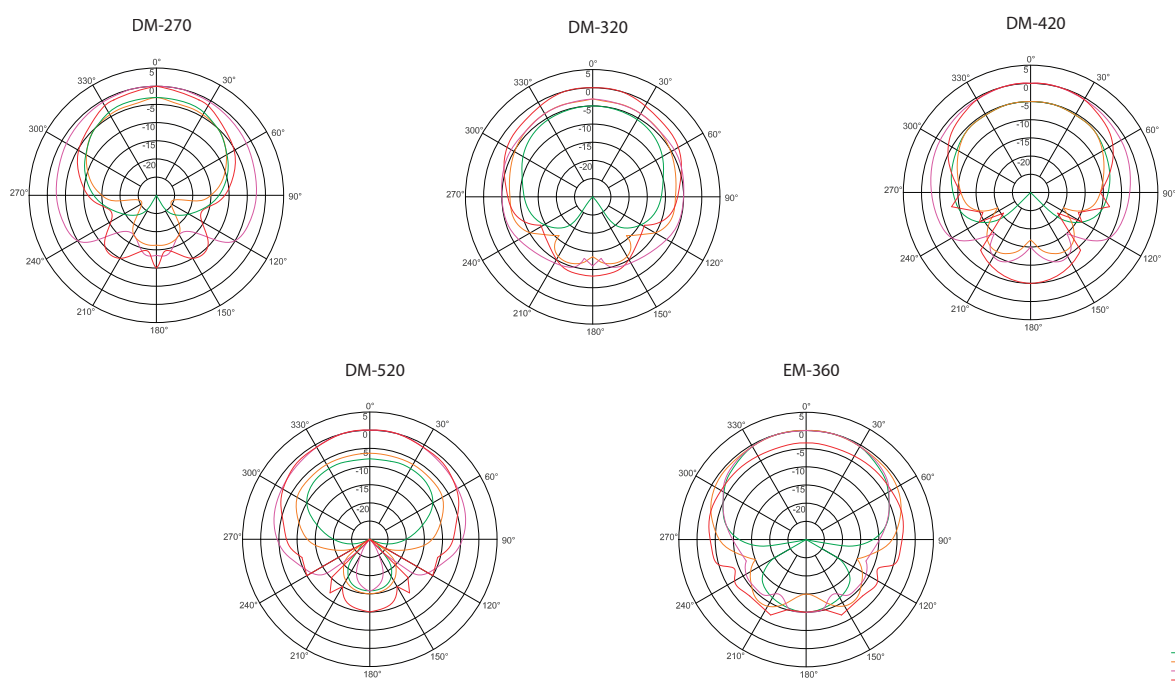

ปรึกษาได้ทุกวันที่เบอร์โทร

Hot Line :

096-849-6566 (คุณวิรัชชัย)

096-686-5455 (คุณมารุต)

นอกเวลาทำงานโทร 081-493-4312

092-092-2637 (คุณชลายุทธ์)

081-314-8519 (คุณเกิดศักดิ์)