



VS218 DR

TANNOY®



Product Description

This versatile, no compromise, all-purpose subwoofer is designed for the most demanding professional applications. The VS218 DR offers exceptional output, high reliability and outstanding sonic performance providing low and VLF reproduction to complement any high SPL full range loudspeakers.

Extending the frequency response of the system to below 30Hz makes the VS218 DR ideal for low frequency effects in high energy clubs, large corporate AV systems, stadiums, live concert halls, theatres, movie theatres and cinemas, large houses of worship and open-air venues. This loudspeaker is capable of delivering deep and powerful bass at high sound pressure levels with extremely low distortion and power compression, while all the time maintaining a uniform frequency response throughout its dynamic range. The large port areas ensure minimal turbulence even at high output levels.

With easy rigging and portability in mind the VS218 DR is equipped with 16 unobtrusive recessed carrying handles whilst 16 x 10mm flying inserts provide a secure flying system. The cabinet is also fitted with 4 pullback points; and 4 rubber feet are provided to facilitate stacking.

The VS218 DR consists of twin 458mm (18.00"), high efficiency drive units producing 106dB/W, with a 100mm (4.00") voice coil. The twin drivers are mounted in an immensely robust 500 litre cabinet constructed from 18mm (5/8") multi-ply birch hardwood and is available in a textured black or white finish as standard. The heavy-duty construction ensures it is able to survive the punishment that speaker systems are subjected to on the road and in club installations.

Features

- 2 x 458mm (18.00") bass units with 4" sandwich voice coil
- Triple aluminium demodulating rings for Ultra low distortion
- Double treated cone for water protection
- Deep, powerful bass performance
- High power handling
- High efficiency
- Rugged birch plywood construction
- 16 x integral carrying handles
- Integral flying points

Applications

- Live sound reinforcement
- Large houses of worship
- Large Corporate AV systems
- Nightclub sub-bass
- Stadiums and other sports facilities
- Live concert halls
- Theatre front of house and effects
- Movie theatres and cinemas
- Side fill in large-scale music reinforcement
- Theme parks and leisure venues
- Open air venues

Tannoy United Kingdom
Tannoy North America
Tannoy Deutschland
Tannoy France

T: 00 44 (0) 1236 420199
T: 00 1 (519) 745 1158
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventes@tannoy.com

tannoy®.com



VS218 DR

TANNOY®

TECHNICAL SPECIFICATIONS

System

Frequency Response (-3dB) ⁽¹⁾ 31Hz - 600Hz

Frequency Response (-10dB) ⁽¹⁾ 24Hz - 1.5kHz

System Sensitivity (1W @1m) ⁽²⁾ 106dB (1W = 2V for 4 Ohms)

Power Handling

Average	2000W
Programme	4000W
Peak	8000W

Recommended Amplifier Power 2 x 1200W - 2000W / 8 Ohms,
or 2400W - 4000W / 4 Ohms

Rated Maximum SPL ⁽²⁾

Average	139dB
Peak	145dB

Nominal Impedance 2 x 8 Ohms

Driver Complement 2 x 458mm (18") Bass drivers

Recommended Crossover 70Hz - 300Hz, 24dB/octave
Recommended High-pass filter
25Hz, 24dB/octave

Distortion

10% Full Power (21.9V)	2nd Harmonic	3rd Harmonic
40Hz	1.22%	1.34%
100Hz	3.48%	1.98%

10% Full Power (7.0V)	2nd Harmonic	3rd Harmonic
40Hz	0.41%	0.41%
100Hz	0.88%	1.03%

Notes:

(1) Average over stated bandwidth. Measured at 1 metre on axis.

(2) Unweighted pink noise input, measured at 1 metre in half space

(3) Accelerated Life Test (EIA RS426-B)

A full range of measurements, performance data, and Ease™ Data can be downloaded from www.tannoy.com

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods will always equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notification.

Construction

Enclosure 500 litres, 18mm (5/8") birch plywood internally braced.

Finish Black or white textured paint (custom colours on request)

Connectors 2 x Speakon NL4MPR IN/OUT and Barrier strip terminals

Fittings 16 x Recessed carrying handles
16 x M10 flying inserts.
4 x Pullback points
4 x Rubber feet.

Dimensions 700mm x 1050mm x 850mm
27.56" x 41.34" x 33.46"

NET Weight 105kg (231.3lbs)

Ordering Information

PART NUMBER
8001 5210

MODEL NAME
VS218 DR

COLOUR
BLACK

PACKED QUANTITY
1

Tannoy United Kingdom
Tannoy North America
Tannoy Deutschland
Tannoy France

T: 00 44 (0) 1236 420199
T: 00 1 (519) 745 1158
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventes@tannoy.com

tannoy.com




VS218 DR

TANNOY®


PERFORMANCE MEASUREMENTS

Anechoic Frequency Response : 1m on-axis

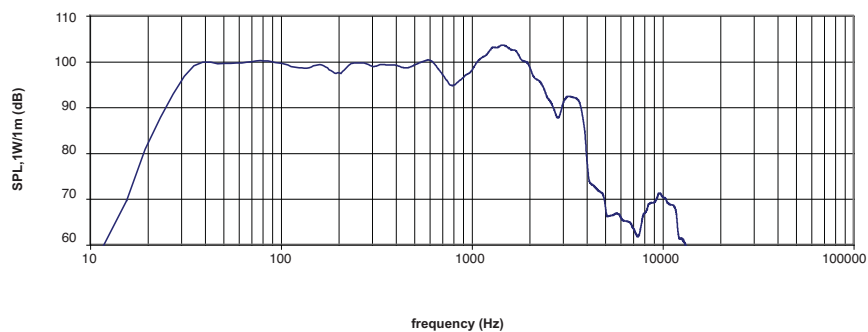

ANECHOIC
FREQUENCY
RESPONSE

Impedance vs Frequency

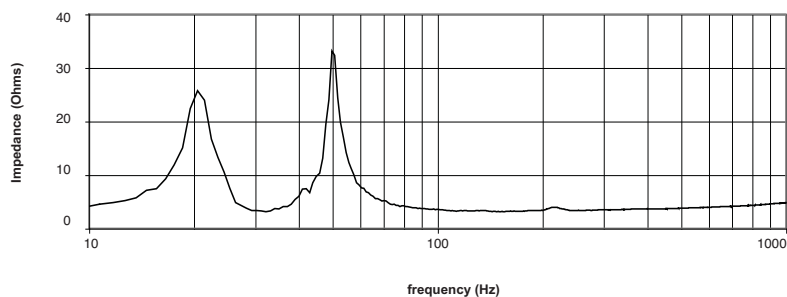

IMPEDANCE

Tannoy United Kingdom
Tannoy North America
Tannoy Deutschland
Tannoy France

T: 00 44 (0) 1236 420199
T: 00 1 (519) 745 1158
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventes@tannoy.com


tannoy®.com




VS218 DR

TANNOY®

DIMENSIONAL SKETCHES

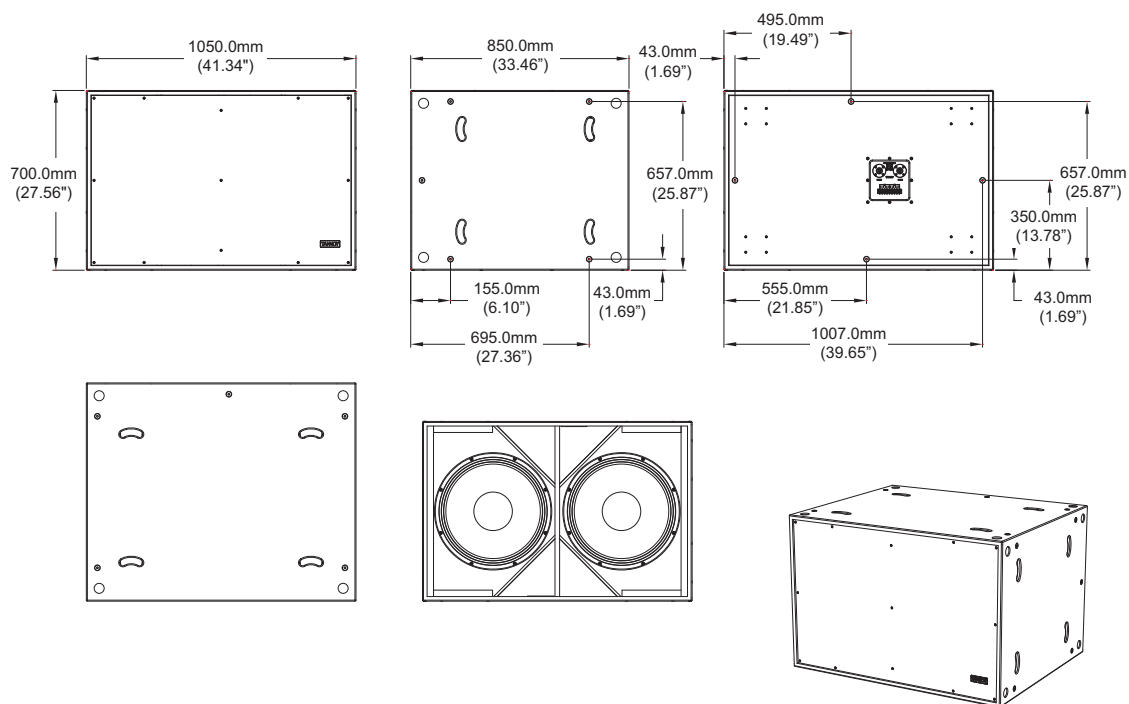

INPUT PANEL

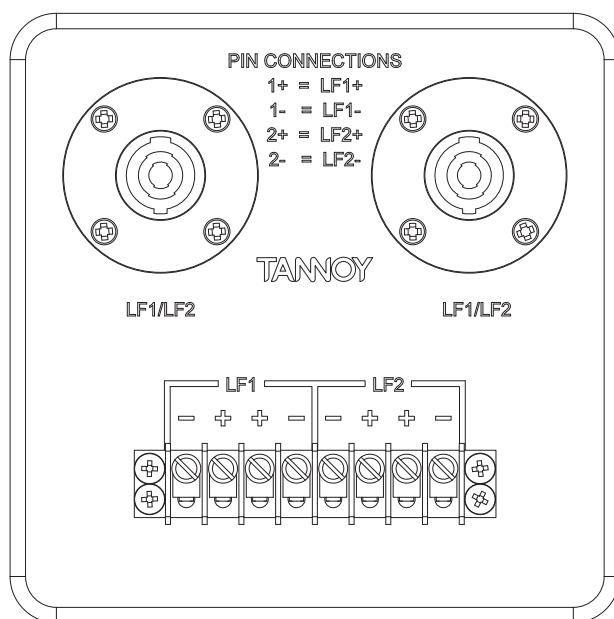

Tannoy United Kingdom
Tannoy North America
Tannoy Deutschland
Tannoy France

T: 00 44 (0) 1236 420199
T: 00 1 (519) 745 1158
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventes@tannoy.com

tannoy.com



Architectural specifications

The bass loudspeaker shall consist of two 458mm (18.00") low frequency transducer mounted within a vented direct radiating enclosure. Performance of the loudspeaker, without any electronic control shall meet or exceed the following criteria: Frequency response measured at 1 metre on axis with swept sine wave shall be 31Hz – 600Hz (-3dB). Sensitivity shall be at least 106dB (half space) for 2.0 Volts @ 1 metre and shall be capable of producing a peak output level of 145dB (half space) on axis at 1 metre.

The system shall have a nominal impedance of 4 Ohms (2 x 8 Ohms) and maximum power handling shall be 4000 Watts (programme). The enclosure shall be an optimally tuned (500 litre) vented enclosure of birch plywood construction finished in a wear resistant textured black paint.

Input connectors shall be two Neutrik™ NL4MPR Speakons, and barrier strip. The enclosure shall be fitted with 16 x integral carrying handles, 4 x pull back points and 16 x M10 flying inserts. The front of the loudspeaker shall be protected with a perforated steel grille, reticulated foam on the inside of the grill & weatherized driver cones. The enclosure shall not exceed the following dimensions: 700mm x 1050mm x 850mm or 27.56 "x 41.34" x 33.46" (H x W x D)

The bass loudspeaker shall be the Tannoy... VS218 DR.



TANNOY®

NOTES

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventas@tannoy.com

tannoy.com



TANNOY®

NOTES

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventas@tannoy.com

tannoy.com



TANNOY®

NOTES

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: anfragen@tannoy.com
E: ventas@tannoy.com

tannoy.com