


## YW-1024 Distributor



The YW-1024 is a distributor that can work in the frequency range of 1.6 to 1,000 MHz (except 50 to 70 MHz). Power passing type permits easy power supply.

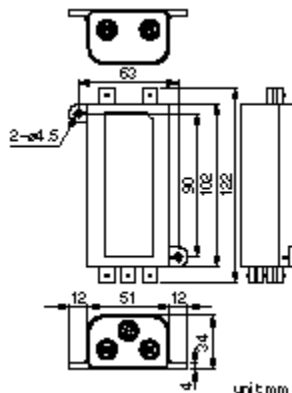

### Spec.

Frequency Range	1.6- 1,000 MHz (excluding 50 □ 70 MHz)
Distribution Loss	8.5 dB □ dB (between the Mixing and each Distribution terminals)
Input/Output Impedance	75Ω
Coaxial Connector	Mixing terminal: BNC jack, power passing type (under 30 V DC, under 2 A) Distribution 1 - 4 terminals: BNC jack, power passing type (under 30 V DC, under 1 A)
Operating Temperature	-10°C to +50°C
Finish	ABS resin, gray
Dimensions	75 (W) × 122 (H) × 34 (D) mm
Weight	120 g